


CALDERA™ 127 LOUVRE BLADE

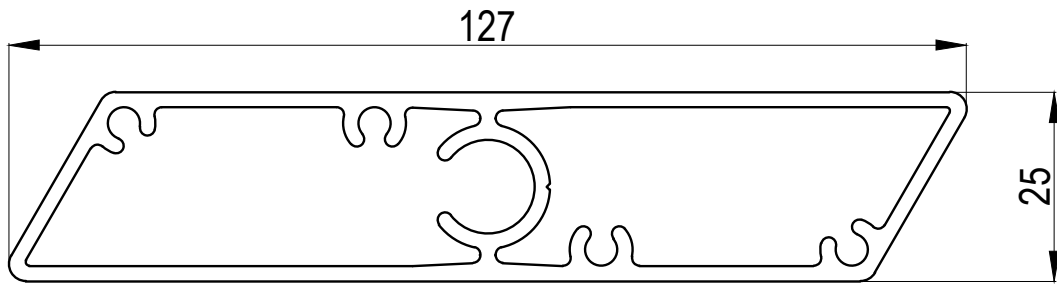

CLDR-LVR 127 - PROFILE

Deflections/Spans for CLDR-LVR 127

Wind Zone	Self Weight	Low	Medium	High	Very High	Extra High
m/s KPa	0.0 m/s 0.0 KPa	32 m/s 0.88 KPa	37 m/s 1.18 KPa	44 m/s 1.68 KPa	50 m/s 2.17 KPa	55 m/s 2.63 KPa
Service load kn/m	0.019	0.094	0.129	0.198	0.260	0.312
Span m	Numbers in cells are deflections in mm					
3.1	4.59	22.31	30.85	47.32	62.08	74.27
3.2	5.21	25.33	35.03	53.72	70.48	84.32
3.3	5.89	28.65	39.61	60.76	79.72	95.37
3.4	6.64	32.28	44.64	68.47	89.83	107.46
3.5	7.46	36.25	50.13	76.88	100.87	120.67
3.6	8.35	40.47	56.10	86.06	112.90	135.07
3.7	9.31	45.27	62.60	96.02	125.98	150.71
KEY:	Light Grey shading = Acceptable span		Dark Grey shading = Over recommended span		Black shading = Unsafe	

*Over Recommended Max Span' is the point at which Auralae considers the deflection as 'unsightly'

*Deflection values assume operable louvres in the closed position (therefore no porosity factor)

*Deflection values assume simple support and do not take into account the integrity of any fixing.

*Deflection values assume a horizontal louvre (not tilted)

*Please contact Auralae if your scenario is : Above 10m height, or is in a specific design location

SHORT FORM SPECIFICATION (CONTACT INSOL FOR FULL SPECIFICATION):

LOUVRE BLADE TYPE: Louvre blades to be Insol extruded aluminium profile CLDR-LVR 127, weighing 1.964 kg/lm.

FIXING METHOD: Louvre blades to be fixed / manually operable / motorised in accordance with architectural drawings and Insol technical literature.

FINISH: Louvre blades and associated support brackets to be anodised / powdercoated as specified by the Architect.

CALDERA™ 127 Technical Data Sheet

© 2018 All rights reserved
Auralae Ltd
Ph: +64 9 218 8690
E: sales@aurae.co.nz
www.aurae.co.nz



Scale: N.T.S.
Date: 7/09/2015
Page: 1 of 1

CLDR-LVR 127 Version 1