



AURAE TECHNICAL DATA SHEET

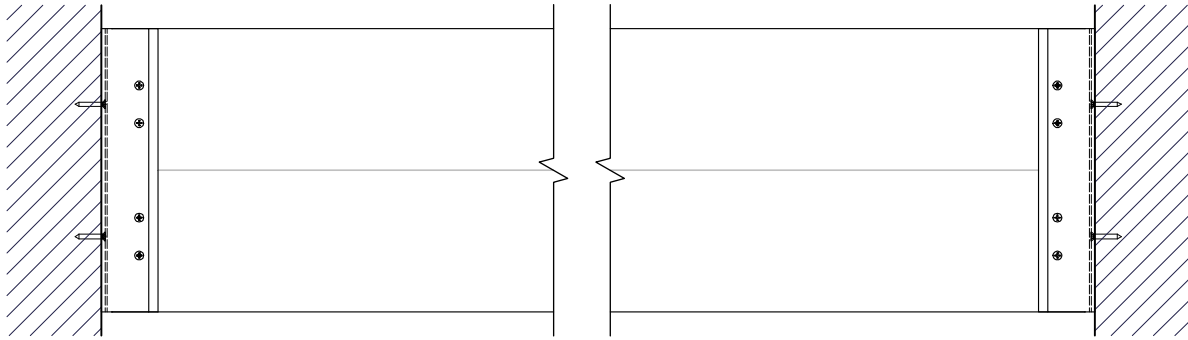

PLAN VIEW

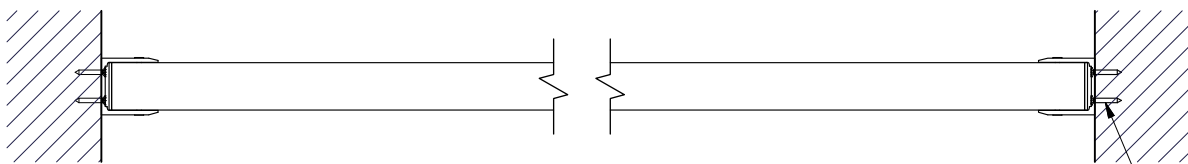

SECTIONED VIEW

Fixings To Structure
(Varies Dependent
On Structure Type)

Configuration and layout:

- The louvre blades can be set at any centres.
- Blade angle can be set at any degree of pitch between completely flat and 90° vertical.

Assembly and Installation:


- The louvre blades are fixed to the end channels with stainless 10gx19 self-tapping screws.

Structural Requirements:

- The length of the louvre blade must be within the span appropriate to the wind loading on the louvre blade. See Span Data Table for spans relative to wind zones.
- The fixing detail of the end channel to the main support structure varies dependent on the type of structure. Contact Aurae for project specific recommendations.

Componentry and Finishes:

- All the aluminium components (the louvre blade, end caps and channel) can be finished with any exterior powder coat or grade of anodising.
- All fixings are stainless steel.

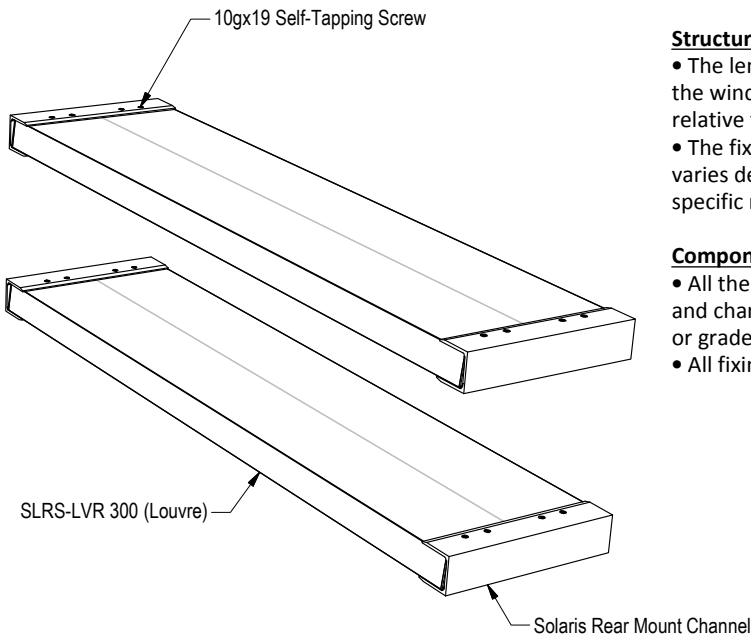

Pictorial

Not sure if this is the correct fixing detail for your project? Contact Aurae to discuss your requirements - we will be able to recommend the most suitable fixing methods for your specific scenario.

**SOLARIS™ 300
END CHANNEL BRACKETED**



© 2018 All rights reserved
Aurae Ltd
Ph: +64 9 218 8690
E: sales@aurae.co.nz
www.aurae.co.nz

Scale: N.T.S.
Date: 4/03/2014

SLRS-LVR 300 ECB Ver. 1